
Rubber Orange Pipe PV5 (BS EN 1401)



Item Code (mm)	Dimension (mm)	Thick. (mm)	Len. mt
PRF-PV5-75x3.0	75	3	6
PRF-PV5-82x3.0	82	3	6
PRF-PV5-82x3.2	82	3.2	6
PRF-PV5-110x3.2	110	3.2	6
PRF-PV5-110x4.0	110	4	6
PRF-PV5-160x3.2	160	3.2	6
PRF-PV5-160x4.0	160	4	6
PRF-PV5-50x2.0	50	2	3
PRF-PV5-75x2.2	75	2.2	3
PRF-PV5-75x3.0	75	3	3
PRF-PV5-110x2.2	110	2.2	3
PRF-PV5-110x3.0	110	3	3
PRF-PV5-110x4.0	110	4	3
PRF-PV5-160x3.8	160	3.8	3
PRF-PV5-160x4.1	160	4.1	6
PRF-PV5-160x5.0	160	5	6
PRF-PV5-160x5.0	160	5	3
PRF-PV5-160x7.7	160	7.7	3

Fittings Orange Pipe PV5 (BS EN 1401)

Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Swept Elbow 87.5°	E1-PV5-50	50	140
	E1-PV5-56	56	110
	E1-PV5-75	75	50
	E1-PV5-82	82	36
	E1-PV5-110	110	27
	E1-PV5-160	160	8

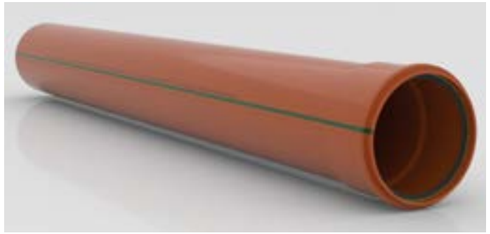

Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Elbow 87.5° with door Swept	E2D-PV5-75	75	40
	E2D-PV5-82	82	35
	E2D-PV5-110	110	22
	E2D-PV5-160	160	8



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Elbow 45°	E3-PV5-50	50	165
	E3-PV5-56	56	130
	E3-PV5-75	75	60
	E3-PV5-82	82	48
	E3-PV5-110	110	35
	E3-PV5-160	160	11



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Tee 87.5° Swept	T1-PV5-50	50	75
	T1-PV5-56	56	50
	T1-PV5-75	75	25
	T1-PV5-82	82	22
	T1-PV5-110	110	14
	T1-PV5-160	160	5



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Swept Tee 87.5° with door	T2D-PV5-75	75	25
	T2D-PV5-82	82	22
	T2D-PV5-110	110	14
	T2D-PV5-160	160	4



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Swept Reducer Tee 87.5°	TR1-PV5-11050	110 x 50	30
	TR1-PV5-11075	110 x 75	24
	TR1-PV5-11082	110 x 82	22
	TR1-PV5-160110	160 x 110	7



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Floor Trap Multi Branch	FT2-PV5-1107550	110 x 75 x 50	24
	FT2-PV5-1108256	110 x 82 x 56	24



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Reducer Socket	R1-PV5-7550	75 x 50	160
	R1-PV5-8256	82 x 56	88
	R1-PV5-11050	110 x 50	54
	R1-PV5-11075	110 x 75	54
	R1-PV5-11082	110 x 82	42
	R1-PV5-160110	160 x 110	20



Fittings Orange Pipe PV5 (BS EN 1401)

Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Socket	S1-PV5-50	50	180
	S1-PV5-56	56	150
	S1-PV5-75	75	72
	S1-PV5-82	82	64
	S1-PV5-110	110	44
	S1-PV5-160	160	14



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Syphon P trap	ST2-PV5-110	110	9



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Syphon S trap	SS2-PV5-110	110	12



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Y (Tee 45°)	Y1-PV5-50	50	65
	Y1-PV5-56	56	50
	Y1-PV5-75	75	25
	Y1-PV5-82	82	20
	Y1-PV5-110	110	14
	Y1-PV5-160	160	4



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Reducer Y (Tee 45°)	YR1-PV5-11050	110 x 50	27
	YR1-PV5-11075	110 x 75	20
	YR1-PV5-11082	110 x 82	20
	YR1-PV5-160110	160 x 110	7



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Double Y (Tree 45°)	YT1-PV5-110	110 x110 x 110	8



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Inspection Socket with door	IS2-PV5-110	110	20



RAKtherm's TRIPLE-SEALING-LIP SOLUTIONS, Engineered Perfection for PVC Sewer Pipe Systems:




The multi-layer reinforced rubber joint, is an integrated seal for plastic pipe systems for aboveground and underground applications of drainage sewerage systems.

RAKtherm's triple-sealing-lip solutions is now the industry-beating performance, it is highly effective seal which requires low-jointing force while ensuring a secure seal across wide range of pipe-joint level tolerances.

Geometric Design for Functionality:
The unique design has a flexible thermoplastic elastomeric sealing element bonded to a polypropylene retaining ring which holds the seal firmly in the correct position during pipe transportation and joint assembly.

RAKtherm triple-sealing-lip seal is designed to have a low assembly force in minimum gap and on maximum gap, which is able to have a good compression on its 3 different lips. The assembly can be done at maximum compression without any problem.

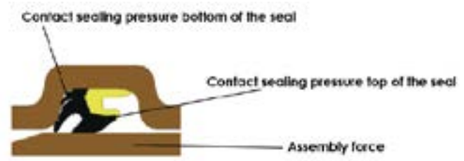

The Concept of Triple-Sealing-Lip from RAKtherm:
DIN lock™ is a combined lip and compression seal that is positioned in the socket by the pipe manufacturer. The seal is designed to absorb any permissible variation in the groove.



Main sealing lip



The Second sealing lip



The third sealing lip

Updated Dec-2025

DWV - RNP Technology

First Reinforced Multi-layer PVC-U in the Region


(Heightened Push-Fit System)



For Inquiries, reach out to us:
+971 7 244 7128
sales@raktherm.com
www.raktherm.com

Download Mobile App

Pipe Push-Fit Gray PV3L. (BS EN 1329)

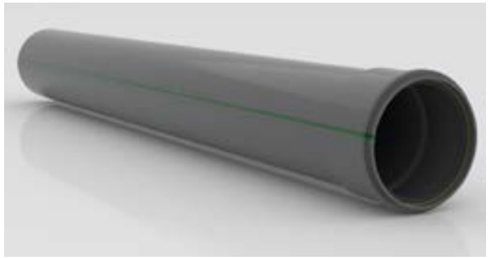

Item Code (mm)	Dimension (mm)	Thick. (mm)	Len. mt
PRF-PV3L-50x2.0	50	2	4
PRF-PV3L-50x2.0	50	2	6
PRF-PV3L-50x2.4	50	2.4	6
PRF-PV3L-50x3.7	50	3.7	6
PRF-PV3L-56x2.0	56	2	4
PRF-PV3L-82x3.0	82	3	6
PRF-PV3L-82x3.2	82	3.2	6
PRF-PV3L-110x2.2	110	2.2	6
PRF-PV3L-110x3.0	110	3	6
PRF-PV3L-110x3.2	110	3.2	6
PRF-PV3L-110x3.8	110	3.8	6
PRF-PV3L-110x4.0	110	4	6
PRF-PV3L-110x5.0	110	5	6
PRF-PV3L-160x3.2	160	3.2	6
PRF-PV3L-160x3.6	160	3.6	6
PRF-PV3L-160x3.8	160	3.8	6
PRF-PV3L-160x4.1	160	4.1	6
PRF-PV3L-160x4.7	160	4.7	6
PRF-PV3L-160x7.7	160	7.7	6
PRF-PV3L-50x2.2	50	2.2	3
PRF-PV3L-50x3.0	50	3	6
PRF-PV3L-50x3	50	3	3
PRF-PV3L-50x3	50	3	5.95
PRF-PV3L-75x2.2	75	2.2	3
PRF-PV3L-75x2.9	75	2.9	6
PRF-PV3L-75x3.0	75	3	6
PRF-PV3L-75x3.6	75	3.6	6
PRF-PV3L-75x3	75	3	3
PRF-PV3L-75x3	75	3	5.95
PRF-PV3L-82x3.0	82	3	5.8
PRF-PV3L-110x3.2	110	3.2	3
PRF-PV3L-110x4.2	110	4.2	6
PRF-PV3L-110x4	110	4	3
PRF-PV3L-110x4	110	4	5.95
PRF-PV3L-110x5.3	110	5.3	6
PRF-PV3L-160x3.2	160	3.2	3
PRF-PV3L-160x5.0	160	5	6
PRF-PV3L-160x5	160	5	3
PRF-PV3L-160x5	160	5	5.95
PRF-PV3L-160x6.0	160	6	5.5
PRF-PV3L-160x6.2	160	6.2	6
PRF-PV3L-200x6.0	200	6	5.5

Fittings Push-Fit Gray PV3L. (BS EN 1329)

Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Swept Elbow 87.5°	E1-PV3L-50	50	140
	E1-PV3L-56	56	110
	E1-PV3L-75	75	50
	E1-PV3L-82	82	36
	E1-PV3L-110	110	27
	E1-PV3L-160	160	8



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Elbow 87.5° with door Swept	E2D-PV3L-75	75	40
	E2D-PV3L-82	82	35
	E2D-PV3L-110	110	22
	E2D-PV3L-160	160	8



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Elbow 45°	E3-PV3L-50	50	165
	E3-PV3L-56	56	130
	E3-PV3L-75	75	60
	E3-PV3L-82	82	48
	E3-PV3L-110	110	35
	E3-PV3L-160	160	11



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Tee 87.5° Swept	T1-PV3L-50	50	75
	T1-PV3L-56	56	50
	T1-PV3L-75	75	25
	T1-PV3L-82	82	22
	T1-PV3L-110	110	14
	T1-PV3L-160	160	5



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Swept Tee 87.5° with door	T2D-PV3L-56	56	60
	T2D-PV3L-75	75	25
	T2D-PV3L-82	82	22
	T2D-PV3L-110	110	14
	T2D-PV3L-160	160	4



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Swept Reducer Tee 87.5°	TR1-PV3L-11050	110 x 50	30
	TR1-PV3L-11075	110 x 75	24
	TR1-PV3L-11082	110 x 82	22
	TR1-PV3L-160110	160 x 110	7



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Floor Trap Multi Branch	FT2-PV3L-1107550	110 x 75 x 50	24
	FT2-PV3L-1108256	110 x 82 x 56	24



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Reducer Socket	R1-PV3L-7550	75 x 50	160
	R1-PV3L-8256	82 x 56	88
	R1-PV3L-11050	110 x 50	54
	R1-PV3L-11075	110 x 75	54
	R1-PV3L-11082	110 x 82	42
	R1-PV3L-160110	160 x 110	20



Fittings Push-Fit Gray PV3L. (BS EN 1329)

Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Socket	S1-PV3L-50	50	180
	S1-PV3L-56	56	150
	S1-PV3L-75	75	72
	S1-PV3L-82	82	64
	S1-PV3L-110	110	44
	S1-PV3L-160	160	14



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Syphon P trap	ST2-PV3L-110	110	9



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Syphon S trap	SS2-PV3L-110	110	12



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Y (Tee 45°)	Y1-PV3L-50	50	65
	Y1-PV3L-56	56	50
	Y1-PV3L-75	75	25
	Y1-PV3L-82	82	20
	Y1-PV3L-110	110	14
	Y1-PV3L-160	160	4



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Reducer Y (Tee 45°)	YR1-PV3L-11050	110 x 50	27
	YR1-PV3L-11075	110 x 75	20
	YR1-PV3L-11082	110 x 82	20
	YR1-PV3L-160110	160 x 110	7



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Double Y (TREE 45°)	YT1-PV3L-110	110 x110 x 110	8



Fitting Item description	Item Code (mm)	Size (mm)	Std.Qty/ Carton (PCS)
Inspection Socket with door	IS2-PV3L-110	110	20

RAKtherm's TRIPLE-SEALING-LIP SOLUTIONS, Engineered Perfection for PVC Sewer Pipe Systems:




The multi-layer reinforced rubber joint, is an integrated seal for plastic pipe systems for aboveground and underground applications of drainage sewerage systems.

RAKtherm's triple-sealing-lip solutions is now the industry-beating performance, it is highly effective seal which requires low-jointing force while ensuring a secure seal across wide range of pipe-joint level tolerances.

Geometric Design for Functionality:
The unique design has a flexible thermoplastic elastomeric sealing element bonded to a polypropylene retaining ring which holds the seal firmly in the correct position during pipe transportation and joint assembly.

RAKtherm triple-sealing-lip seal is designed to have a low assembly force in minimum gap and on maximum gap, which is able to have a good compression on its 3 different lips. The assembly can be done at maximum compression without any problem.

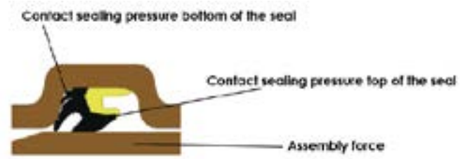

The Concept of Triple-Sealing-Lip from RAKtherm:
DIN lock™ is a combined lip and compression seal that is positioned in the socket by the pipe manufacturer. The seal is designed to absorb any permissible variation in the groove.



Main sealing lip



The Second sealing lip




The third sealing lip

Updated Dec-2025

DWV - RNP Technology

First Reinforced Multi-layer PVC-U in the Region

(Heightened Push-Fit System)

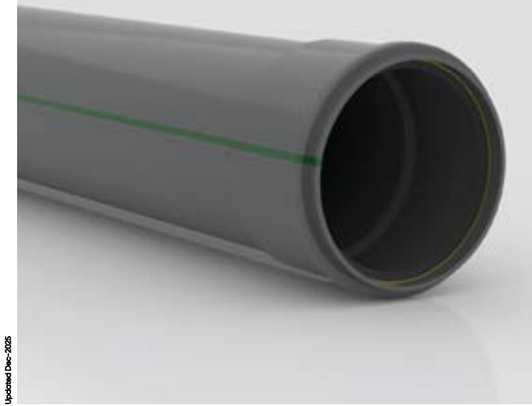

For Inquiries, reach out to us:
+971 7 244 7128
sales@raktherm.com
www.raktherm.com

Download Mobile App